

## Deckshield ED



A flexible polyurethane flexible car park deck coating system providing a colourful crack bridging, waterproof surface for exposed decks of car parks.



### Flexible

Resistant to cracking – flexible waterproof membrane



### UV Resistant

100% UV stable formulation available to prevent the floor from yellowing



### Slip Resistant:

Positively textured anti-slip surface minimizes slip and skid risks



### Chemical Resistant:

Protects against diesel, fuel, antifreeze, hydraulic fluid, chlorides and battery acid

## Technical Information<sup>1</sup>

REACTION TO FIRE	
B <sub>n</sub> -s1	EN 13501-1
SLIP RESISTANCE <sup>2</sup>	
Class III Wet > 55	EN 1504-2
CRACK BRIDGING ABILITY	
Class A3(-20°C)	EN 1062-7
TEMPERATURE RESISTANCE	
from -35°C to +70°C (intermittent)	
WATER PERMEABILITY	
Karsten test - Nil (Impermeable)	
CHEMICAL RESISTANCE	
Resistant to petrol, diesel, antifreeze, hydraulic fluids and battery acids	
RESISTANCE TO CHLORIDE IONS	
DOT BD47/94: Appendix B, Method B4,2(d)	No chloride ion penetration after 28 days
WEAR RESISTANCE	
Taber Test: < 3000 mg wheel H22/1000 g /1000 cycles	EN ISO 5470-1
TENSILE STRENGTH/ RELATIVE ELONGATION (N/mm <sup>2</sup> /%)	
1 day: 5.4 MPa/50.4% 7 days: 7.15 MPa/40.2% 28 days: 7.17 MPa/30.5%	BS 2782: Part 3 Method 320A Samples tested at 70°C
FLEXIBILITY IN LOW TEMPERATURES	
No damage of the membrane at -20°C	MOAT 27: Method 5.4.2
TEAR STRENGTH	
Class III (≥20 Nm)	EN ISO 6272-1
ADHESION BY PULL-OFF TESTS	
Higher than concrete class C20/25 surface resistance (> 1,5 MPa)	EN 1542



Arabian Yellow



Forest Green



Dark Grey



Tile Red



Mid Grey



Traffic Blue

The applied colours may differ from the examples shown.  
For a full colour chart and samples, contact your local CPG Europe office.

<sup>1</sup>The figures in the table beside are typical properties achieved in laboratory tests – these results may vary depending on the conditions on the installation site. <sup>2</sup>The final anti-slip properties of the floor are influenced by the application method, the size and shape of the aggregate used for the topcoat (aggregate recommendations available from CPG Eastern Europe), the degree of abrasion, maintenance and the nature the dirt.

## Model Specification

<b>System:</b>	Deckshield ED
<b>Finish:</b>	Gloss
<b>Thickness<sup>3</sup>:</b>	Approx. 2,0 mm
<b>Colour</b>	According to the catalog
<b>Producer:</b>	CPG Europe
<b>Supplier:</b>	Tremco CPG Poland Sp. z o.o.
<b>Telephone</b>	+48 22 879 89 07

<sup>3</sup> In case of special usage requirements, the system can be applied in thickness up to 5.0 mm.

## Installation Service

The installation should be carried out by a Flowcrete approved contractor with a documented quality assurance scheme. Obtain details of our approved contractors by contacting CPG Eastern Europe or enquiring via website at [www.flowcrete.com.pl](http://www.flowcrete.com.pl).

## Products Included in this System

<b>Primer<sup>4</sup>:</b>	Deckshield SF Natural quartz sand 0,1–0,3 mm Natural quartz sand 0,1–0,5 mm
<b>Elastic membrane:</b>	Deckshield EM
<b>Main layer:</b>	Deckshield SF Natural quartz sand 0,1–0,3 mm Natural quartz sand 0,8–1,2 mm
<b>Topcoat:</b>	Deckshield Finish Deckshield Topcoat (UV resistant)
<p><sup>4</sup> If other resins are used contact CPG Eastern Europe for further details. Detailed application instructions are available upon request.</p>	

## Speed of Cure

	+10°C	+20°C	+30°C
<b>Light Traffic</b>	30 hrs	16 hrs	10 hrs
<b>Full traffic</b>	36 hrs	24 hrs	16 hrs
<b>Full chemical cure</b>	12 days	7 days	5 days

## Substrate Requirements

Concrete or screed substrate should be class min. C20/25, a minimum bond strength of 1,5 MPa (pull-off test), surface even, clean, free from laitance, dust and other contamination. All damages in the substrate should be repaired prior to applying the flooring. The substrate should be dry up to 75% RH as per BS 8204 (5% humidity measured by the Tramex method) and free from rising damp and ground water pressure. In case of higher humidity, one should use Hydraseal DPM as primer. Details to be found in the *Flowcrete Resin Flooring Substrate Requirements*.


## Aftercare – Cleaning and Maintenance

Clean regularly manually or using a machine in conjunction with a mildly alkaline detergent. Flowcrete Flooring Cleaning Instruction available upon request.

## Crack Bridging Properties

Using the flexible Deckshield Elastomeric Membrane enhances the crack bridging abilities of Deckshield flooring systems up to 2 mm wide cracks.

## System Design

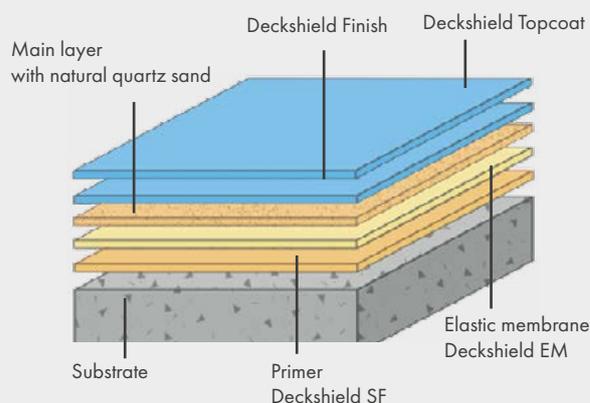

## Environmental Considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless, impermeable surface with perfect adhesion to the substrate reduce the need for repairs, maintenance and cleaning. VOC content < 10 g/l.

Technical information, recommendations and instructions concerning the product use, storage and maintenance included in this System Data Sheet are based on Tremco CPG Poland Sp. z o.o. (further related as „CPG Polska”) knowledge and experience, reflecting the best acknowledged way of using the material for a given moment. Taking into consideration other factors that are beyond the producer’s control, including differences in quality of substrates, tools and other complementary materials, weather conditions, proper installation and also cleaning and maintenance, CPG Polska cannot take responsibility in case of failure to conform with information and instructions included in this System Data Sheet or, respectively, written recommendations from authorized CPG Polska representatives. One should always conform with up-to-date norms and building principles, and also safety, hygiene and health protection rules according to the information included in Material Safety Data Sheets and also on the products packaging. This System Data Sheet replaces all previous versions. In order to receive up-to-date System Data Sheets contact CPG Polska.

[25/05/21]

CPG Eastern Europe  
ul. Marywilska 34, 03-228 Warsaw, Poland  
tel.: +48 22 879 8907  
email: [poland@cpg-europe.com](mailto:poland@cpg-europe.com)

**CPG** Construction  
Products Group  
Europe

[www.flowcrete.com.pl](http://www.flowcrete.com.pl)